

2001



ski-doo
ski-doo

Grand Touring STD 500/600
Grand Touring GS 700
Formula Deluxe STD 500/600
Formula Deluxe GS 700
Formula Deluxe GSE 600/700
MX Z STD 500/600/700/800
MX Z Trail 500/600/700

MX Z Adrenaline 600/700
MX Z X 600/700/800
Summit STD 600/700
Summit X 700/800
Summit H.M. 700
Summit H.M. X 800

Volume 3

**Shop
Manual**

484 200 026

2001 Shop Manual

VOLUME 3

GRAND TOURING STD 500/STD 600/GS 700

FORMULA DELUXE STD 500/600
FORMULA DELUXE GS 700
FORMULA DELUXE GSE 600/700

MX Z STD 500/600/700/800
MX Z TRAIL 500/600/700
MX Z ADRENALINE 600/700
MX Z X 600/700/800

SUMMIT STD 600/700
SUMMIT X 700/800
SUMMIT H.M. 700
SUMMIT H.M. X 800

BOMBARDIER
RECREATIONAL PRODUCTS



Legal deposit:

National Library of Quebec

4th trimester 2000

National Library of Canada 2000

All rights reserved. No parts of this manual may be reproduced in any form without the prior written permission of Bombardier Inc.

©Bombardier Inc. 2000

Technical Publications

Bombardier Inc.

Valcourt (Quebec) Canada

Printed in Canada

®*Registered trademarks of Bombardier Inc.

This document contains the trademarks of the following companies:

Crest® is a trademark of Crest Industries Inc.

Kimtowels® is a trademark of Kimberly-Clark

Loctite® is a trademark of Loctite Corporation

Molykote® is a trademark of Dow Corning Corporation

Silastic® is a trademark of Dow Corning Corporation

Snap-on® is a trademark of Snap-on Tools Corporation

Versilube® is a trademark of General Electric Company

Supertanium™ is a trademark of Premier Industrial Corporation

TABLE OF CONTENTS

SECTION	SUBSECTION	PAGE
SAFETY NOTICE		III
WHAT'S NEW		IV
INTRODUCTION		V
01	SERVICE TOOLS AND SERVICE PRODUCTS	
	01 – Service tools.....	01-01-1
	02 – Service products.....	01-02-1
02	LUBRICATION AND MAINTENANCE	
	01 – Periodic maintenance chart.....	02-01-1
03	TROUBLESHOOTING	
	01 – Table of contents.....	03-01-1
	02 – Engine	03-02-1
	03 – Fuel and oil systems.....	03-03-1
	04 – Transmission and brake systems.....	03-04-1
	05 – Electrical system	03-05-1
	06 – Suspension and track	03-06-1
04	ENGINE	
	01 – Table of contents.....	04-01-1
	02 – 493, 593, 693 and 793 engine types.....	04-02-1
	03 – Leak test and engine dimension measurement.....	04-03-1
	04 – CDI system.....	04-04-1
	05 – Oil injection system.....	04-05-1
	06 – Liquid cooling system.....	04-06-1
	07 – Rewind starter.....	04-07-1
	08 – Carburetor and fuel pump	04-08-1
	09 – Fuel tank and throttle cable.....	04-09-1
05	TRANSMISSION	
	01 – Table of contents.....	05-01-1
	02 – Drive belt.....	05-02-1
	03 – Drive pulley.....	05-03-1
	04 – Driven pulley.....	05-04-1
	05 – Pulley distance and alignment.....	05-05-1
	06 – Brake	05-06-1
	07 – Chaincase	05-07-1
	08 – Gearbox.....	05-08-1
	09 – Drive chain.....	05-09-1
06	ELECTRICAL	
	01 – Table of contents.....	06-01-1
	02 – Ignition timing.....	06-02-1
	03 – Spark plugs.....	06-03-1
	04 – Battery.....	06-04-1
	05 – Electric starter	06-05-1
	06 – Testing procedure	06-06-1
07	REAR SUSPENSION	
	01 – Table of contents.....	07-01-1
	02 – SC-10 II suspension.....	07-02-1
	03 – SC-10 Mountain suspension	07-03-1
	04 – Drive axle.....	07-04-1
	05 – Track.....	07-05-1

TABLE OF CONTENTS

SECTION	SUBSECTION	PAGE
08 STEERING/ FRONT SUSPENSION	01 – Table of contents	08-01-1
	02 – Steering system.....	08-02-1
	03 – Suspension and ski system	08-03-1
09 BODY/FRAME	01 – Table of contents	09-01-1
	02 – Body.....	09-02-1
	03 – Frame.....	09-03-1
10 TECHNICAL DATA	01 – SI metric information guide.....	10-01-1
	02 – Engines	10-02-1
	03 – Vehicles.....	10-03-1
	04 – Technical data legends.....	10-04-1
11 WIRING DIAGRAMS	01 – Wiring diagrams	11-01-1

SAFETY NOTICE

This manual has been prepared as a guide to correctly service and repair some 2001 Ski-Doo snowmobiles. See model list below.

This edition was primarily published to be used by snowmobile mechanic technicians who are already familiar with all service procedures relating to Bombardier made snowmobiles. Mechanic technicians should attend continuous training courses given by Bombardier Training Dept.

Please note that the instructions will apply only if proper hand tools and special service tools are used.

This *Shop Manual* uses technical terms which may be slightly different from the ones used in the *Parts Catalog*.

It is understood that this manual may be translated into another language. In the event of any discrepancy, the English version shall prevail.

The content depicts parts and/or procedures applicable to the particular product at time of writing. *Service* and *Warranty Bulletins* may be published to update the content of this manual. Make sure to read and understand these.

In addition, the sole purpose of the illustrations throughout the manual, is to assist identification of the general configuration of the parts. They are not to be interpreted as technical drawings or exact replicas of the parts.

The use of Bombardier parts is most strongly recommended when considering replacement of any component. Dealer and/or distributor assistance should be sought in case of doubt.

The engines and the corresponding components identified in this document should not be utilized on product(s) other than those mentioned in this document.

Torque wrench tightening specifications must be strictly adhered to. Locking devices (ex.: locking tab, self-locking fasteners, etc.) must be installed or replaced with new ones. If the efficiency of a locking device is impaired, it must be renewed.

This manual emphasizes particular information denoted by the wording and symbols:

WARNING

Identifies an instruction which, if not followed, could cause serious personal injury including possibility of death.

CAUTION: Denotes an instruction which, if not followed, could severely damage vehicle components.

NOTE: Indicates supplementary information needed to fully complete an instruction.

Although the mere reading of such information does not eliminate the hazard, your understanding of the information will promote its correct use. Always use common shop safety practice.

Bombardier Inc. disclaims liability for all damages and/or injuries resulting from the improper use of the contents. We strongly recommend that any services be carried out and/or verified by a highly skilled professional mechanic. It is understood that certain modifications may render use of the vehicle illegal under existing federal, provincial and state regulations.

WHAT'S NEW

WHAT'S NEW

SERVICE TOOLS AND SERVICE PRODUCTS

- New 21 mm circlip installer.
- New C-36 and C-46 service tools.
- Reintroduction of Molykote G-n paste for RAVE valve stem.

493, 593, 693 AND 793 ENGINES TYPES

- New oil seal on RAVE valve stem.
- New Isoflex grease application.
- New tightening sequence for crankcase screws.

OIL INJECTION SYSTEM

- Adjustment procedure.

REWIND STARTER

- New type of lubricant is used on all moving parts.

CARBURETOR AND FUEL PUMP

- TM carburetor repair procedure.

SC-10 II SUSPENSION

- New BOSS shock servicing procedure.
- New T/A HPG shock repair procedure.

SC-10 MOUNTAIN SUSPENSION

- New subsection.

INTRODUCTION

INTRODUCTION

This *Shop Manual Volume 3* covers the following Bombardier made 2001 snowmobiles:

MODELS	MODEL NUMBER	MODELS	MODEL NUMBER
GRAND TOURING* STD 500 (BLACK) (Canada).....	1799	FORMULA DELUXE GSE 600 (CLOUD) (U.S.).....	1834
GRAND TOURING STD 500 (BLACK) (U.S.)	1800	FORMULA DELUXE GSE 700 (RED) (Canada).....	1764
GRAND TOURING STD 500 (BLACK) (Europe)	1801	FORMULA DELUXE GSE 700 (RED) (U.S.)	1765
GRAND TOURING STD 500 (CLOUD) (Canada).....	1802	FORMULA DELUXE GSE 700 (CLOUD) (Canada).....	1766
GRAND TOURING STD 500 (CLOUD) (U.S.)	1803	FORMULA DELUXE GSE 700 (CLOUD) (U.S.).....	1767
GRAND TOURING STD 600 (BLACK) (Canada).....	1794	MX Z TRAIL 500 (YELLOW) (Canada).....	1706
GRAND TOURING STD 600 (BLACK) (U.S.)	1795	MX Z TRAIL 500 (YELLOW) (U.S.).....	1707
GRAND TOURING STD 600 (BLACK) (Europe)	1796	MX Z TRAIL 500 (BLACK) (Canada)	1708
GRAND TOURING STD 600 (CLOUD) (Canada).....	1797	MX Z TRAIL 500 (BLACK) (U.S.)	1709
GRAND TOURING STD 600 (CLOUD) (U.S.)	1798	MX Z TRAIL 600 (YELLOW) (Canada).....	1691
GRAND TOURING GS 700 (BLACK)(Canada)	1789	MX Z TRAIL 600 (YELLOW) (U.S.).....	1692
GRAND TOURING GS 700 (BLACK) (U.S.)	1790	MX Z TRAIL 600 (BLACK) (Canada)	1693
GRAND TOURING GS 700 (BLACK) (Europe) ...	1791	MX Z TRAIL 600 (BLACK) (U.S.)	1694
GRAND TOURING GS 700 (CLOUD)(Canada) ...	1792	MX Z TRAIL 700 (YELLOW) (Canada).....	1676
GRAND TOURING GS 700 (CLOUD) (U.S.)	1793	MX Z TRAIL 700 (YELLOW) (U.S.).....	1677
FORMULA* DELUXE STD 500 (RED) (Canada).....	1778	MX Z TRAIL 700 (BLACK) (Canada)	1678
FORMULA DELUXE STD 500 (RED) (U.S.)	1779	MX Z TRAIL 700 (BLACK) (U.S.)	1679
FORMULA DELUXE STD 500 (CLOUD) (Canada).....	1780	MX Z STD 500 (YELLOW) (Canada).....	1710
FORMULA DELUXE STD 500 (CLOUD) (U.S.).....	1781	MX Z STD 500 (YELLOW) (U.S.).....	1711
FORMULA DELUXE STD 600 (RED) (Canada)	1773	MX Z STD 500 (YELLOW) (Europe)	1712
FORMULA DELUXE STD 600 (RED) (U.S.)	1774	MX Z STD 500 (BLACK) (Canada)	1713
FORMULA DELUXE STD 600 (CLOUD) (Canada).....	1775	MX Z STD 500 (BLACK) (U.S.)	1714
FORMULA DELUXE STD 600 (CLOUD) (U.S.).....	1776	MX Z STD 600 (YELLOW) (Canada).....	1701
FORMULA DELUXE STD 600 (CLOUD) (Europe)	1777	MX Z STD 600 (YELLOW) (U.S.).....	1702
FORMULA DELUXE GS 700 (RED) (Canada)	1768	MX Z STD 600 (YELLOW) (Europe)	1703
FORMULA DELUXE GS 700 (RED) (U.S.)	1769	MX Z STD 600 (BLACK) (Canada)	1704
FORMULA DELUXE GS 700 (CLOUD) (Canada).....	1770	MX Z STD 600 (BLACK) (U.S.)	1705
FORMULA DELUXE GS 700 (CLOUD) (U.S.)	1771	MX Z STD 700 (YELLOW) (Canada).....	1686
FORMULA DELUXE GS 700 (CLOUD) (Europe)	1772	MX Z STD 700 (YELLOW) (U.S.).....	1687
FORMULA DELUXE GSE 600 (RED) (Canada).....	1831	MX Z STD 700 (BLACK) (Canada)	1688
FORMULA DELUXE GSE 600 (RED) (U.S.)	1832	MX Z STD 700 (BLACK) (U.S.)	1689
FORMULA DELUXE GSE 600 (CLOUD) (Canada).....	1833	MX Z STD 700 (BLACK) (Europe).....	1690
		MX Z STD 700 (YELLOW) (Europe)	1703
		MX Z STD 800 (YELLOW) (Canada).....	1870
		MX Z STD 800 (YELLOW) (U.S.).....	1871
		MX Z STD 800 (BLACK) (Canada)	1872
		MX Z STD 800 (BLACK) (U.S.)	1873
		MX Z ADRENALINE 600 (YELLOW) (Canada) ...	1695
		MX Z ADRENALINE 600 (YELLOW) (U.S.)	1696
		MX Z ADRENALINE 600 (BLACK) (Canada).....	1697
		MX Z ADRENALINE 600 (BLACK) (U.S.).....	1698
		MX Z ADRENALINE 600 (RED) (Canada).....	1689
		MX Z ADRENALINE 600 (RED) (U.S.).....	1700

INTRODUCTION

MODELS	MODEL NUMBER
MX Z ADRENALINE 700 (YELLOW) (Canada) ...	1680
MX Z ADRENALINE 700 (YELLOW) (U.S.)	1681
MX Z ADRENALINE 700 (BLACK) (Canada).....	1682
MX Z ADRENALINE 700 (BLACK) (U.S.).....	1683
MX Z ADRENALINE 700 (RED) (Canada).....	1684
MX Z ADRENALINE 700 (RED) (U.S.).....	1685
MX Z ADRENALINE 800 (YELLOW) (Canada) ...	1856
MX Z ADRENALINE 800 (YELLOW) (U.S.)	1857
MX Z ADRENALINE 800 (BLACK) (Canada).....	1858
MX Z ADRENALINE 800 (BLACK) (U.S.).....	1859
MX Z ADRENALINE 800 (RED) (Canada).....	1860
MX Z ADRENALINE 800 (RED) (U.S.).....	1861
MX Z X 600 (YELLOW) (Canada)	1825
MX Z X 600 (YELLOW) (U.S.)	1826
MX Z X 600 (BLACK) (Canada).....	1827
MX Z X 600 (BLACK) (U.S.).....	1828
MX Z X 600 (RED) (Canada).....	1829
MX Z X 600 (RED) (U.S.).....	1830
MX Z X 700 (YELLOW) (Canada)	1670
MX Z X 700 (YELLOW) (U.S.).....	1671
MX Z X 700 (BLACK) (Canada).....	1672
MX Z X 700 (BLACK) (U.S.).....	1673
MX Z X 700 (RED) (Canada).....	1674
MX Z X 700 (RED) (U.S.).....	1675
MX Z X 800 (YELLOW) (Canada)	1663
MX Z X 800 (YELLOW) (U.S.)	1664
MX Z X 800 (BLACK) (Canada).....	1665
MX Z X 800 (BLACK) (U.S.).....	1666
MX Z X 800 (BLACK) (Europe)	1667
MX Z X 800 (RED) (Canada).....	1668
MX Z X 800 (RED) (U.S.)	1669
SUMMIT STD 600 (YELLOW) (Canada).....	1758
SUMMIT STD 600 (YELLOW) (U.S.).....	1759
SUMMIT STD 600 (BLACK) (Canada)	1760
SUMMIT STD 600 (BLACK) (U.S.)	1761
SUMMIT STD 700 (YELLOW) (Canada).....	1753
SUMMIT STD 700 (YELLOW) (U.S.).....	1754
SUMMIT STD 700 (YELLOW) (Europe)	1757
SUMMIT STD 700 (BLACK) (Canada)	1755
SUMMIT STD 700 (BLACK) (U.S.)	1756
SUMMIT H.M. 700 (YELLOW) (Canada).....	1735
SUMMIT H.M. 700 (YELLOW) (U.S.).....	1736
SUMMIT H.M. 700 (BLACK) (Canada)	1737
SUMMIT H.M. 700 (BLACK) (U.S.).....	1738
SUMMIT H.M. 800 (YELLOW) (Canada).....	1862
SUMMIT H.M. 800 (YELLOW) (U.S.).....	1863
SUMMIT H.M. 800 (BLACK) (Canada)	1864
SUMMIT H.M. 800 (BLACK) (U.S.).....	1865

MODELS	MODEL NUMBER
SUMMIT X 700 (YELLOW) (Canada)	1747
SUMMIT X 700 (YELLOW) (U.S.)	1748
SUMMIT X 700 (BLACK) (Canada).....	1749
SUMMIT X 700 (BLACK) (U.S.).....	1750
SUMMIT X 700 (RED) (Canada)	1751
SUMMIT X 700 (RED) (U.S.)	1752
SUMMIT X 800 (YELLOW) (Canada)	1740
SUMMIT X 800 (YELLOW) (U.S.)	1741
SUMMIT X 800 (YELLOW) (Europe).....	1746
SUMMIT X 800 (BLACK) (Canada).....	1742
SUMMIT X 800 (BLACK) (U.S.).....	1743
SUMMIT X 800 (RED) (Canada).....	1744
SUMMIT X 800 (RED) (U.S.)	1745
SUMMIT H.M. X 800 (YELLOW) (Canada)	1723
SUMMIT H.M. X 800 (YELLOW) (U.S.)	1724
SUMMIT H.M. X 800 (BLACK) (Canada).....	1725
SUMMIT H.M. X 800 (BLACK) (U.S.).....	1726
SUMMIT H.M. X 800 (RED) (Canada)	1727
SUMMIT H.M. X 800 (RED) (U.S.)	1728
SUMMIT H.M. X 800 (RED) (Europe)	1824

*Trademarks of Bombardier Inc.


All the above listed models are ZX Series models.



TYPICAL — ZX SERIES

VEHICLE IDENTIFICATION NUMBER

Vehicle Identification Number Location

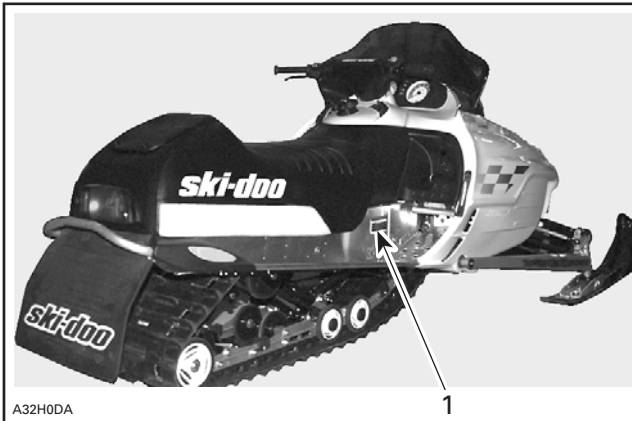


A32H0DA

TYPICAL

1. Vehicle identification number


Identification Number Meaning

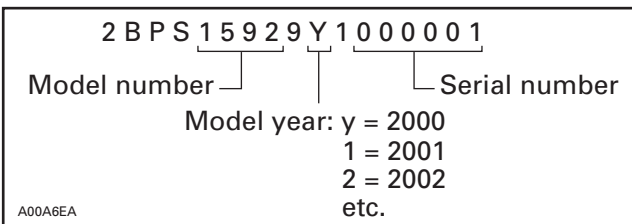

A00A6EA

ENGINE SERIAL NUMBER

Engine Serial Number Location

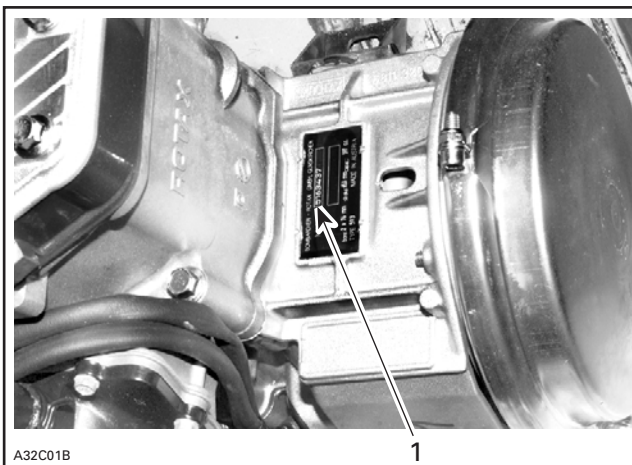

A32C01B

TYPICAL

1. Engine serial number

LIST OF ABBREVIATIONS USED IN THIS MANUAL

A	ampere
amp	ampere
A•h	ampere-hour
AC	alternate current
ACM	acceleration and control modulator
ADSA	advanced direct shock action
BDC	bottom dead center
BTDC	before top dead center
°C	degree Celsius
cc	cubic centimeter
CDI	capacitor discharge ignition
CTR	center
cm	centimeter
cm ²	square centimeter
cm ³	cubic centimeter
DC	direct current
DESS	digitally encoded security system
DPM	digital performance management
°F	degree Fahrenheit
FC	fan cooled
fl. oz	fluid ounce
ft	foot
GRD	ground
H.A.C.	high altitude compensator
hal.	halogen
HI	high
IFP	internal floating piston
imp. oz	imperial ounce
in	inch
in ²	square inch
in ³	cubic inch
k	kilo (thousand)
kg	kilogram
km/h	kilometer per hour
kPa	Kilopascal
L	liter
lb	pound
lbf	pound (force)

INTRODUCTION

lbf/in ²	pound per square inch
LH	left hand
LO	low
LT	long track
m	meter
MAG	magneto
Max.	maximum
Min.	minimum
mL	milliliter
mm	millimeter
M.E.	millennium edition
MPEM	multi-purpose electronic module
MPH	mile per hour
N	newton
N.A.	not applicable
no.	number
00.0	continuity
0.L	open line (open circuit)
O.D.	outside diameter
OPT	optional
oz	ounce
P/N	part number
PSI	pound per square inch
PTO	power take off
R	rectangular
RH	right hand
RAVE	Rotax adjustable variable exhaust
RER	Rotax electronic reverse
RPM	revolution per minute
RMS	root mean square
RRIM	reinforced reaction injection molding
Sp. Gr.	specific gravity
ST	semi-trapez
TDC	top dead center
TRA	total range adjustable
U.S. oz	ounce (United States)
V	volt
Vac	volt (alternative current)

ARRANGEMENT OF THE MANUAL

The manual is divided into 11 major sections:

- 01 SERVICE TOOLS AND SERVICE PRODUCTS
- 02 LUBRICATION AND MAINTENANCE
- 03 TROUBLESHOOTING
- 04 ENGINE
- 05 TRANSMISSION
- 06 ELECTRICAL
- 07 REAR SUSPENSION
- 08 STEERING/FRONT SUSPENSION
- 09 BODY/FRAME
- 10 TECHNICAL DATA
- 11 WIRING DIAGRAMS

Each section is divided in various subsections, and again, each subsection has one or more division.

This *Shop Manual* uses technical terms which may be slightly different from the ones in the parts catalog.

TYPICAL PAGE

Section 07 REAR SUSPENSION
Subsection 01 (SUSPENSION SC-10 SPORT, TOURING AND MOUNTAIN)

SUSPENSION SC-10 SPORT, TOURING AND MOUNTAIN
Grand Touring 500/580, Formula 500/583 and Summit 500

Page heading indicates section and subsection detailed.

Subsection title indicates beginning of the subsection.

Italic subtitle above exploded view indicate pertaining models.

Exploded view assists you in identifying parts and related positions.

Drop represents a liquid product to be applied to a surface. In this case Loctite 271 to screw threads.

Bold face number indicates special procedure concerning this part.

Dotted box contains parts of a particular model in this case the short track models only.

Illustration number for publishing process.

Document number for publishing process.

Tightening torque nearby fastener. In this case, nut must be torqued to 4 N•m or 35 lbf•in.

Page numbering system:
07: REAR SUSPENSION section
01: SUSPENSION SC-10 SPORT, TOURING AND MOUNTAIN subsection
1: First page of this subsection

4 N•m (35 lbf•in)

18 N•m (160 lbf•in)

Low temp. grease

Loctite 271

SLE only

Long track models only

Short track models only

A03P245

MMR2000_042_00_02A.FM

07-01-1


A01A2AS

INTRODUCTION

TYPICAL PAGE

Section 05 TRANSMISSION Subsection 03 (DRIVEN PULLEY)


Turn puller handle and sliding half at once to extract the bushing.



IMPORTANT: Large bushing retaining screws and washers must be removed before small bushing installation.

Coat bushing outside diameter with Loctite 609 (P/N 413 703 100).

Install bushing as following photo.



ASSEMBLY

Came Slider Shoe

When replacing slider shoes no. 4, always install a new set (3 shoes) to maintain equal pressure on the cam.

Assemble driven pulley components by reversing the disassembly procedure.

Cam

Coat cam no. 18 interior with anti-seize lubricant.

MMR2000_042_00-02A.FM

05-03-5

INSTALLATION

Countershaft

CAUTION: Always apply anti-seize lubricant (P/N 413 701 000) on the countershaft before final pulley installation.


A-Series and B-Series Only

Should installation procedure be required, refer to BRAKE then look for Brake Disc and Countershaft Bearing Adjustment.

Reinstall the pulley on the countershaft by reversing the removal procedure.

All Models

Check end play of driven pulley on countershaft by pushing pulley towards outer housing so that the inner shims (P/N 504 108 200) contact it. Measure end play at the mounting screw end between shim(s) and pulley. See illustration.



TYPICAL — TOP VIEW

- 1. Shim (P/N 504 108 200) (as required)
- 2. Contact
- A. 0.2 to 1 mm (0 to 3/64 in)

Torque retaining screw no. 13 to 25 N•m (18 lbf•ft).

ADJUSTMENT

Refer to PULLEY DISTANCE AND ALIGNMENT to adjust pulley distance. Adjust drive belt height between pulley halves to obtain specified belt deflection.

Title indicates main procedure to be carried-out.

Italic bold face type setting indicates a particular procedure concerning a model.

Italic bold face setting in this case indicates that particular procedure for A and B-Series is finished, so from this point, all models are concerned.

“TYPICAL” caption indicates a general view which does not represent full detail.

“TOP VIEW” caption helps you in understanding illustration.

Call-outs for above illustration.

Reference to look up a certain section and subsection. In this case it concerns pulleys adjustment.

Illustration always follows text to which it pertains.

Subtitle indicates a particular procedure for the named part.

Bold face number following part name refers to exploded view at beginning of subsection.

GENERAL INFORMATION

The information and component/system descriptions contained in this manual are correct at time of publication. Bombardier Inc. however, maintains a policy of continuous improvement of its products without imposing upon itself any obligation to install them on products previously manufactured.

Due to late changes, it may have some differences between the manufactured product and the description and/or specifications in this document.

Bombardier Inc. reserves the right at any time to discontinue or change specifications, designs, features, models or equipment without incurring obligation.

USEFUL PUBLICATIONS

Refer to *Parts Catalogs* to order the right parts.

PARTS CATALOG	
MODELS	P/N
Grand Touring 500/600/GS 700	484 400 163
Formula 500/600/700	484 400 143
MX Z 500/600/700	484 400 123
MX Z X 800	484 400 213
Summit 600/700/800	484 400 133

Use *Specification Booklet* to find rapidly the right specs.

1997-2001 SPECIFICATION BOOKLET (P/N 484 300 198).

ILLUSTRATIONS AND PROCEDURES


Illustrations and photos show the typical construction of the different assemblies and, in all cases, may not reproduce the full detail or exact shape of the parts shown. However, they represent parts which have the same or a similar function.

CAUTION: Most components of those vehicles are built with parts dimensioned in the metric system. Most fasteners are metric and must not be replaced by customary fasteners or vice-versa. Mismatched or incorrect fasteners could cause damage to the vehicle or possible personal injury.

As many of the procedures in this manual are interrelated, we suggest, that before undertaking any task, you read and thoroughly understand the entire section or subsection in which the procedure is contained.

A number of procedures throughout the book require the use of special tools. Before commencing any procedure, be sure that you have on hand all the tools required, or approved equivalents.

The use of RIGHT and LEFT indications in the text, always refers to driving position (when sitting on vehicle).

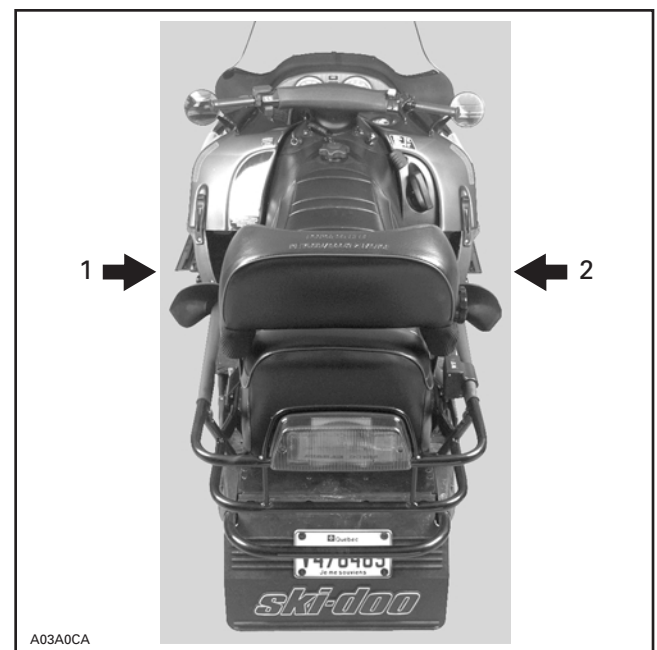

TYPICAL

1. Left
2. Right

SELF-LOCKING FASTENERS PROCEDURE

The following describes the most common application procedures when working with self-locking fasteners.

Use a metal brush or a tap to clean the hole properly then use a solvent (Methyl-Chloride), let act during 30 minutes and wipe off. The solvent utilization is to ensure the adhesive works properly.

INTRODUCTION


LOCTITE APPLICATION PROCEDURE

The following describes the most common application procedures when working with Loctite products.

NOTE: Always use proper strength Loctite product as recommended in this *Shop Manual*.

THREADLOCKER


Uncovered Holes (bolts and nuts)

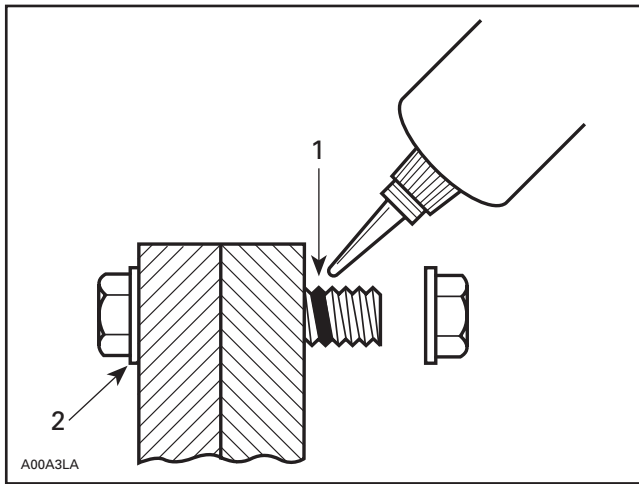

1. Apply here
2. Do not apply

1. Clean threads (bolt and nut) with solvent.
2. Apply Loctite Primer N (P/N 293 800 041) on threads and allow to dry.
3. Choose proper strength Loctite threadlocker.
4. Fit bolt in the hole.
5. Apply a few drops of threadlocker at proposed tightened nut engagement area.
6. Position nut and tighten as required.


Blind Holes

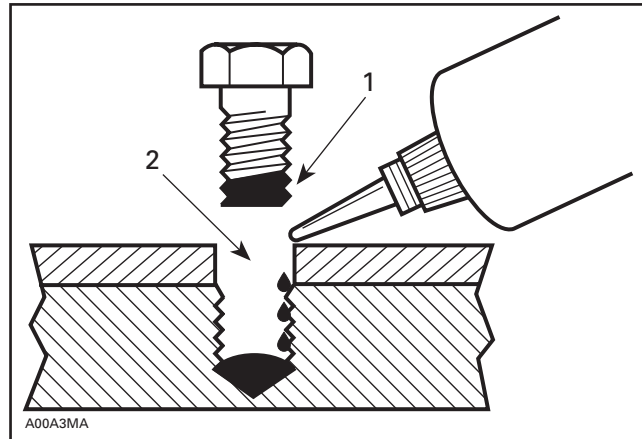

1. On threads
2. On threads and at the bottom of hole

1. Clean threads (bolt and hole) with solvent.
2. Apply Loctite Primer N (P/N 293 800 041) on threads (bolt and nut) and allow to dry for 30 seconds.
3. Choose proper strength Loctite threadlocker.
4. Apply several drops along the threaded hole and at the bottom of the hole.
5. Apply several drops on bolt threads.
6. Tighten as required.


Stud in Blind Holes

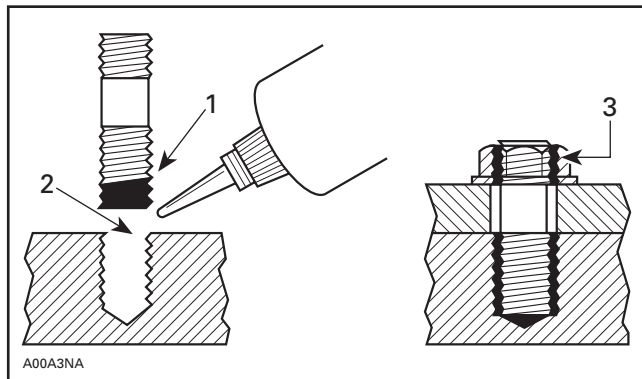

1. On threads
2. On threads and in the hole
3. Onto nut threads

1. Clean threads (stud and hole) with solvent.
2. Apply Loctite Primer N (P/N 293 800 041) on threads and allow to dry.
3. Put several drops of proper strength Loctite threadlocker on female threads and in hole.
4. Apply several drops of proper strength Loctite on stud threads.
5. Install stud.
6. Install cover, etc.
7. Apply drops of proper strength Loctite on uncovered threads.
8. Tighten nuts as required.

Preassembled Parts

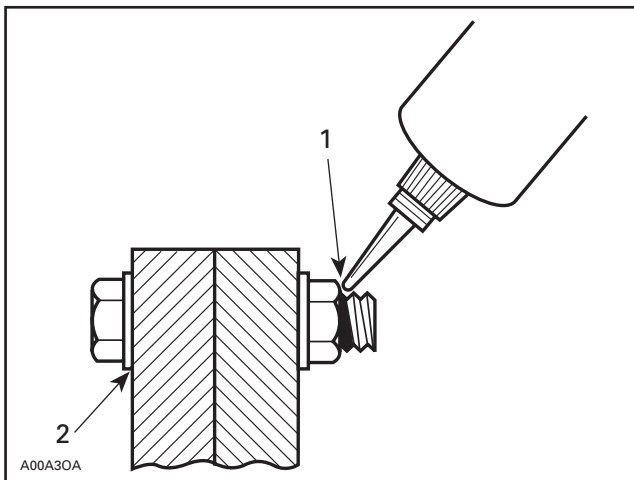


1. Apply here
2. Do not apply

1. Clean bolts and nuts with solvent.
2. Assemble components.
3. Tighten nuts.
4. Apply drops of proper strength Loctite on bolt/nut contact surfaces.
5. Avoid touching metal with tip of flask.

NOTE: For preventive maintenance on existing equipment, retighten nuts and apply proper strength Loctite on bolt/nut contact surfaces.

Adjusting Screw

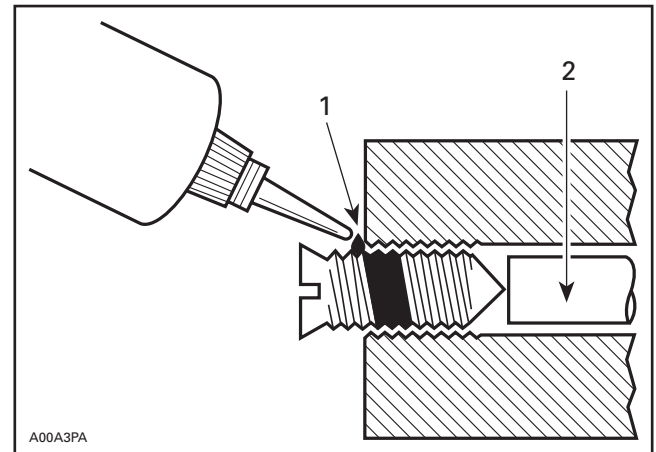


1. Apply here
2. Plunger

1. Adjust screw to proper setting.
2. Apply drops of proper strength Loctite threadlocker on screw/body contact surfaces.
3. Avoid touching metal with tip of flask.

NOTE: If it is difficult to readjust, heat screw with a soldering iron (232°C (450°F)).

STRIPPED THREAD REPAIR

Stripped Threads

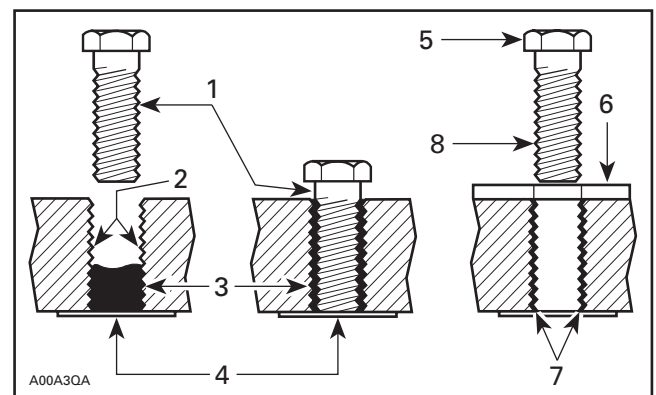

1. Release agent
2. Stripped threads
3. Form-A-Thread
4. Tape
5. Cleaned bolt
6. Plate
7. New threads
8. Threadlocker

INTRODUCTION

Standard Thread Repair

1. Follow instructions on Loctite FORM-A-THREAD 81668 package.
2. If a plate is used to align bolt:
 - a. Apply release agent on mating surfaces.
 - b. Put waxed paper or similar film on the surfaces.
3. Twist bolt when inserting it to improve thread conformation.

NOTE: NOT intended for engine stud repairs.

Repair of Small Holes/Fine Threads

Option 1: Enlarge damaged hole, then follow **Standard Thread Repair** procedure.


Option 2: Apply FORM-A-THREAD on the screw and insert in damaged hole.

Permanent Stud Installation (light duty)

1. Use a stud or thread on desired length.
2. DO NOT apply release agent on stud.
3. Do a **Standard Thread Repair**.
4. Allow to cure for 30 minutes.
5. Assemble.

GASKET COMPOUND

All Parts

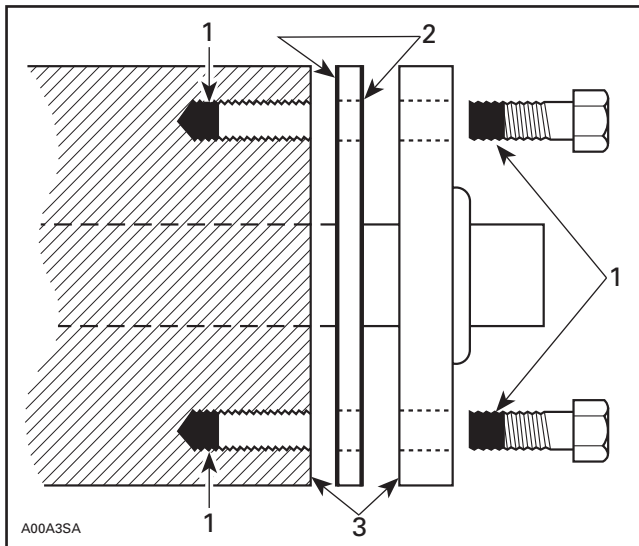

1. Proper strength Loctite
2. Loctite Primer N (P/N 413 708 100) and Gasket Eliminator 515 (P/N 413 702 700) on both sides of gasket
3. Loctite Primer N only

1. Remove old gasket and other contaminants with Loctite Chisel remover (P/N 413 708 500). Use a mechanical mean if necessary.

NOTE: Avoid grinding.

2. Clean both mating surfaces with solvent.
3. Spray Loctite Primer N on both mating surfaces and on both sides of gasket. Allow to dry 1 or 2 minutes.
4. Apply GASKET ELIMINATOR 515 (P/N 413 702 700) on both sides of gasket, using a clean applicator.

5. Place gasket on mating surfaces and assemble immediately.


NOTE: If the cover is bolted to blind holes (above), apply proper strength Loctite in the hole and on threads. Tighten.

If holes are sunken, apply proper strength Loctite on bolt threads.

6. Tighten as usual.

MOUNTING ON SHAFT

Mounting with a Press

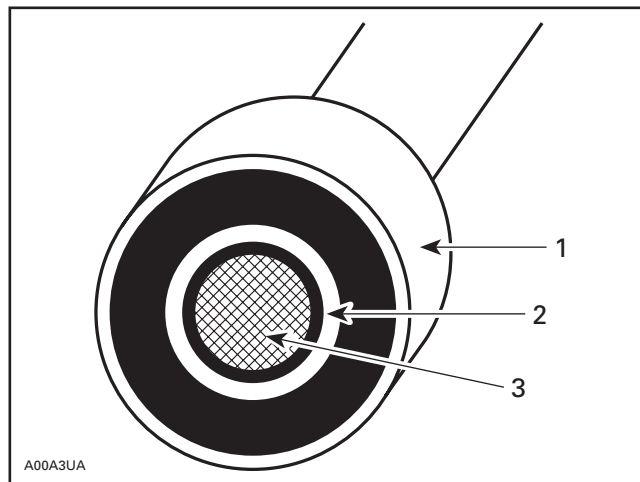

1. Bearing
2. Proper strength Loctite
3. Shaft

Standard

1. Clean shaft external part and element internal part.
2. Apply a strip of proper strength Loctite on shaft circumference at insert or engagement point.

NOTE: Retaining compound is always forced out when applied on shaft.


3. DO NOT use anti-seize Loctite or any similar product.
4. No curing period is required.

Mounting in Tandem

1. Apply retaining compound on internal element bore.
2. Continue to assemble as shown above.

CASE-IN COMPONENTS

Metallic Gaskets

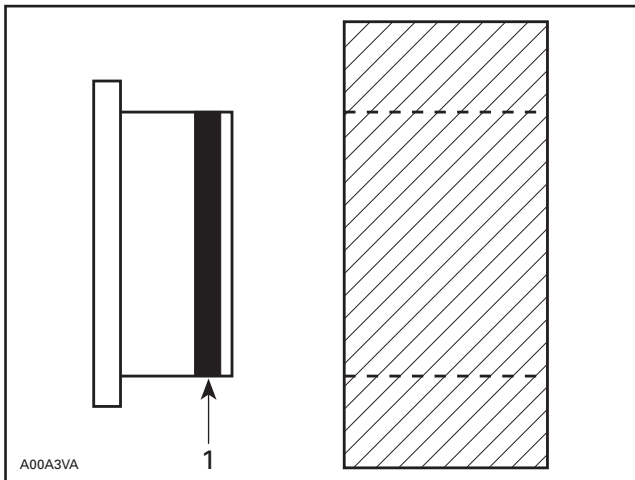

1. Proper strength Loctite

1. Clean inner housing diameter and outer gasket diameter.
2. Spray housing and gasket with Loctite Primer N (P/N 293 800 041).
3. Apply a strip of proper strength Loctite on leading edge of outer metallic gasket diameter.

NOTE: Any Loctite product can be used here. A low strength liquid is recommended as normal strength and gap are required.

4. Install according to standard procedure.
5. Wipe off surplus.
6. Allow it to cure for 30 minutes.

NOTE: Normally used on worn-out housings to prevent leaking or sliding.

It is generally not necessary to remove gasket compound applied on outer gasket diameter.

INTRODUCTION

TIGHTENING TORQUES

Tighten fasteners to torque mentioned in exploded views and text. When they are not specified refer to following table. Bold face size (e.g. **M4**) indicates nominal value (mean value).

N•m	FASTENER SIZE (8.8 GRADE)	Lbf•in
2	M4	18
3	M4	27
4	M5	35
8	M6	71
9	M6	80
10	M6	89
11	M6	97
12	M6	106

N•m	FASTENER SIZE (8.8 GRADE)	Lbf•ft
21	M8	15
22	M8	16
23	M8	17
24	M8	18
25	M8	18
43	M10	32
44	M10	32
45	M10	33
46	M10	34
47	M10	35
48	M10	35
49	M10	36
50	M10	37
51	M10	38
52	M10	38
53	M10	39
76	M12	56
77	M12	57
78	M12	58
79	M12	58
80	M12	59
81	M12	60
82	M12	60
83	M12	61
84	M12	62
121	M14	89
122	M14	90

N•m	FASTENER SIZE (8.8 GRADE)	Lbf•ft
123	M14	91
124	M14	91
125	M14	92
126	M14	93
127	M14	94
128	M14	94
129	M14	95
130	M14	96
131	M14	97
132	M14	97
133	M14	98
134	M14	99
135	M14	100
136	M14	100
137	M14	101
138	M14	102
139	M14	103
140	M14	103
141	M14	104
142	M14	105
143	M14	105
144	M14	106
145	M14	107
146	M14	108
147	M14	108
148	M14	109
149	M14	110
150	M14	111

Bombardier SERVICE PUBLICATIONS REPORT

Publication title and year _____ Page _____

Machine _____ Report of error Suggestion

We would be pleased if you could communicate to Bombardier any suggestions you may have concerning our publications.

Name _____

Address _____

City and State/Prov. _____ Date _____

Zip code/Postal code _____

Bombardier SERVICE PUBLICATIONS REPORT

Publication title and year _____ Page _____

Machine _____ Report of error Suggestion

Name _____

Address _____

City and State/Prov. _____ Date _____

Zip code/Postal code _____

Bombardier SERVICE PUBLICATIONS REPORT

Publication title and year _____ Page _____

Machine _____ Report of error Suggestion

Name _____

Address _____

City and State/Prov. _____ Date _____

Zip code/Postal code _____



AFFIX
PROPER
POSTAGE



BOMBARDIER
RECREATIONAL PRODUCTS

Technical Publications
After Sales Service
565 de la Montagne Street
Valcourt, Quebec, Canada J0E 2L0

AFFIX
PROPER
POSTAGE



BOMBARDIER
RECREATIONAL PRODUCTS

Technical Publications
After Sales Service
565 de la Montagne Street
Valcourt, Quebec, Canada J0E 2L0

AFFIX
PROPER
POSTAGE



BOMBARDIER
RECREATIONAL PRODUCTS

Technical Publications
After Sales Service
565 de la Montagne Street
Valcourt, Quebec, Canada J0E 2L0